




The Art of Automotive Finishing

Ganxing Professional Polishers

Product Catalog **2026**



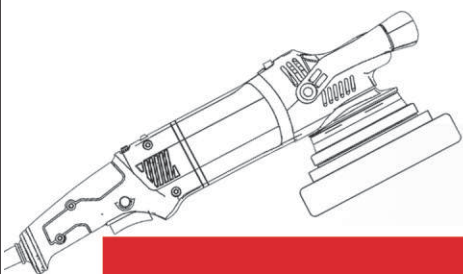

Our focus: Automotive, Stone & Metal Surface Polishing
Product Core: Innovation-driven power,
craftsmanship-defined quality

About us

Yongkang Ganxing Power Tools Co., Ltd. is a technology-driven enterprise integrating R&D, intelligent manufacturing, and global sales. We have long been dedicated to surface polishing technologies, focusing on the research, development, and application-driven innovation of professional polishing power tools.

Built around real-world operating scenarios, we have developed a comprehensive product portfolio ranging from corded to cordless solutions, and from lightweight to heavy-duty applications. Our tools are widely used in professional sectors including automotive polishing, stone surface finishing, and metal surface treatment. All core products are powered by the latest generation AC/DC brushless drive systems, engineered at the system level to optimize power efficiency, thermal management, and component integration. This ensures stable, continuous high-performance output even under prolonged, high-load operating conditions.


Guided by a Human-Centered Design philosophy, we deeply integrate power systems, intelligent control, and structural engineering. Through rigorous validation and fine-tuning of grip angle, weight distribution, transmission architecture, as well as noise and vibration (NVH) characteristics, our tools deliver high efficiency while significantly reducing operator fatigue. The result is a quieter, more controllable working experience that allows professionals to focus on craftsmanship itself.

Backed by a digital precision manufacturing system, Ganxing has established comprehensive engineering standards covering key component selection, assembly accuracy control, and overall machine reliability. Through durability testing, environmental testing, and strict consistency management, we ensure stable performance and long-term reliability throughout the entire product lifecycle—effectively extending the service life of every tool.

The company holds multiple national design and utility model patents and has obtained internationally recognized certifications including CCC, ETL, and CE. Our products are exported to major markets across the European Union, North America, South America, and Southeast Asia, continuously serving professional users worldwide.

Looking ahead, Ganxing will continue to be driven by technology, powered by engineering innovation, and centered on user experience—creating the next generation of power tools that combine performance, rational aesthetics, and intelligent functionality.

Ganxing Tools — Powering Innovation, Driving Excellence.



Rotary



Gear Action



Dual Action



ETL Certification




CE Certification



CCC Certification



Double Insulation Class II

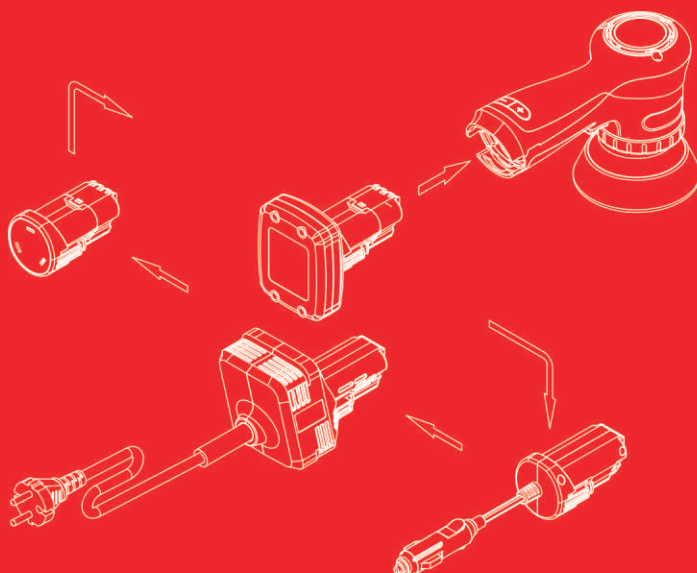

Multi-Power Supply System

Three power options available: lithium-ion battery, car power adapter, and household AC power adapter for versatile use in different scenarios.

Mini Polisher CE

Brushless external rotor technology
High power output



Digital display shows precise rotational speed

Display flashes red when overloaded

GX5906RO



Backing Plate Size	75mm
Rated Voltage	10.8V
Battery Capacity	2.5Ah
Rated Current	20A
Orbit	0mm
No Load Speed	600-2200 RPM
Weight	0.75kg
Inner Box Dimensions	335x210x110mm
Qty	8pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x350x455mm

GX5906DA



Backing Plate Size	75mm
Rated Voltage	10.8V
Battery Capacity	2.5Ah
Rated Current	20A
Orbit	12mm
No Load Speed	4000-7000 OPM
Weight	0.78kg
Inner Box Dimensions	335x210x110mm
Qty	8pcs
G.W./N.W.	17.5/16.5kg
Carton Dimensions	440x350x455mm

Battery charger

Input Voltage/frequency	100-240VAC/50/60Hz
Output Voltage	13VDC
Output Power	31.2W

Battery Packs



59012500

LI-ION CELL
ICR18650 - 2500mAh 3.7V 2500mAh
Battery Voltage: 10.8VDC
Capacity: 2.5Ah / 27Wh



59015000

LI-ION CELL
ICR18650 - 2500mAh 3.7V 5000mAh
Battery Voltage: 10.8VDC
Capacity: 5.0Ah / 54Wh



GX5901-II Mini Polisher
The Ultimate All-in-One:
Cordless & Coded, Rotary & Dual-Action

II GX5901

Mini polisher



**BRUSHLESS
MOTOR**



LCD Intelligent Speed Control



Tool-Free Quick-Change Drive
Head for Orbital & Rotary Modes



Ergonomic soft rubber handle: shock-absorbing,
anti-slip for fatigue-free operation



DC Brushless Outer Rotor
Motor for High Power Output

Tool-Free Quick-Change Drive Head for Orbital & Rotary Modes



Optional 5.0Ah battery pack



Versatile Multi-Power System.
Three power options:
lithium-ion battery, car adapter,
and household AC adapter for
use in any scenario.



Standard Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	380x80x230mm
Qty	6pcs
G.W./N.W.	11/10kg
Carton Dimensions	495x395x245mm



Deluxe Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V / AC110-240V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	510x95x300mm
Qty	5pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	520x520x315mm

Battery-Operated
Mode



12V Car
Adapter Mode



AC Mains
Power Mode



GX5901

Mini toothbrush type polisher



12V Car Adapter Mode



AC Mains Power Mode



Standard Set

Backing Plate Size	30/50mm
Rated Voltage	DC10.8-12V
Orbit	3/12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5000 OPM
Rated Current	5A
Inner Box Dimensions	380x80x230mm
Qty	6pcs
G.W./N.W.	12.5/11.5kg
Carton Dimensions	495x395x245mm


Deluxe Set

Backing Plate Size	30/30/75mm
Rated Voltage	DC10.8-12V / AC110-240V
Orbit	3/12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5000 OPM
Rated Current	5A
Inner Box Dimensions	510x90x300mm
Qty	5pcs
G.W./N.W.	16/15kg
Carton Dimensions	520x520x315mm



12mm Orbital Module 3mm Orbital Module





II GX5901B

Mini Polisher



**BRUSHLESS
MOTOR**



Rotary Orbit 8mm Orbit 12mm



12V Car
Adapter Mode



AC Mains
Power Mode

Standard Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	380x80x230mm
Qty	6pcs
G.W./N.W.	11/10kg
Carton Dimensions	495x395x245mm

Deluxe Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V / AC110-240V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	510x95x300mm
Qty	5pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	520x520x315mm

III GX5901

Mini Polisher



**BRUSHLESS
MOTOR**

Multi-Patented Design

Full-body rubber coating for maximum comfort, anti-slip control, and superior vibration dampening.

LCD Display



Delivers high torque and heavy-duty power with enhanced efficiency.



Flashes red automatically when the tool exceeds rated load to protect the motor.

Slide Switch with Lock-On




Available in both press-fit and twist-lock mounting options.

Cordless & Coded All-in-One Rotary & Dual Action Hybrid Polisher

3-in-1 Flexible Power Supply.

Seamlessly switch between 100-240V AC household power, 10.8V-12V DC lithium-ion battery, and 12V DC car power adapter for unlimited runtime.

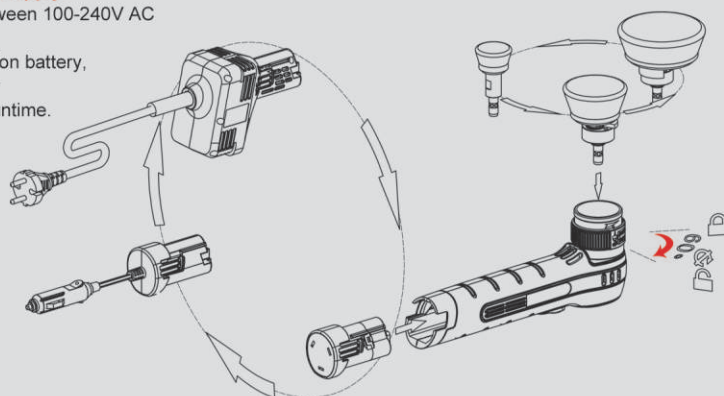

3 Interchangeable Drive Heads. Quickly switch between three modes: Rotary, 8mm DA and 12mm DA.



60° Twist-to-Lock Function. Effortless attachment and removal of driving components.



Standard Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	380x80x230mm
Qty	6pcs
G.W./N.W.	11/10kg
Carton Dimensions	495x395x245mm



Deluxe Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V / AC110-240V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	510x95x300mm
Qty	5pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	520x520x315mm



Deluxe Set

Backing Plate Size	30-75mm
Rated Voltage	DC10.8-12V / AC110-240V
Rated Current	16A
Orbit	8mm /12mm
Battery Capacity	2.5Ah
Charging Time	45Min
No Load Speed	2000-5800 OPM
Inner Box Dimensions	510x95x300mm
Qty	5pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	520x520x315mm



Cordless Random Orbital Polisher

GX5905



**BRUSHLESS
MOTOR**



Polishing Pad Size	50/75/100mm
Backing Plate Size	30/50/75mm
Rated Voltage	18-21V
Battery Capacity	2.0Ah-4.0Ah
Orbit	8/12mm
No Load Speed	2000-4500 OPM
Rated Current	25A
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	19/18kg
Carton Dimensions	440x390x300mm



RO & DA TWO IN ONE

Tool-Free Quick-Change Drive Head for Orbital & Rotary Modes



12mm/8mm Orbit Drive Heads, Rotary Drive Head





Ideal for a wide range of polishing applications with effortless control. Specially engineered for high-gloss finish and swirl-free paint correction.

GX5905DA1



**BRUSHLESS
MOTOR**

Cordless Random Orbital Polisher

Polishing Pad Size	100mm
Backing Plate Size	74mm
Rated Voltage	18-21V
Battery Capacity	2.0Ah-4.0Ah
Orbit	12mm
No Load Speed	2000-4500 OPM
Rated Current	25A
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	19.5/18.5kg
Carton Dimensions	440x390x300mm



GX5905DA2



**BRUSHLESS
MOTOR**

Cordless Random Orbital Polisher

Polishing Pad Size	150mm
Backing Plate Size	123mm
Rated Voltage	18-21V
Battery Capacity	2.0Ah-4.0Ah
Orbit	12mm
No Load Speed	2000-4500 OPM
Rated Current	25A
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	19.5/18.5kg
Carton Dimensions	440x390x300mm





GX5966DA1



**BRUSHLESS
MOTOR**



Cordless Random Orbital Polisher

Polishing Pad Size	150mm
Backing Plate Size	123mm
Rated Voltage	18-21V
Orbit	15mm
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	1800-4800 OPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	20.5/19.5kg
Carton Dimensions	455x355x355mm



GX5966DA2



**BRUSHLESS
MOTOR**



Cordless Random Orbital Polisher

Polishing Pad Size	160mm
Backing Plate Size	146mm
Rated Voltage	18-21V
Orbit	15mm
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	1800-4800 OPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	20.5/19.5kg
Carton Dimensions	455x355x355mm



GX5966DA3



**BRUSHLESS
MOTOR**



Cordless Random Orbital Polisher

Polishing Pad Size	150mm
Backing Plate Size	125mm
Rated Voltage	18-21V
Orbit	15mm
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	1800-4800 OPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	19.5/18.5kg
Carton Dimensions	455x355x355mm



Ergonomic Head Grip



D-Handle Grip



Side Handle Grip





GX5905GA



**BRUSHLESS
MOTOR**



Cordless Gear-Driven Dual Action Polisher

Polishing Pad Size	100mm
Backing Plate Size	74mm
Rated Voltage	18-21V
Battery Capacity	2.0Ah-4.0Ah
Orbit	5mm
No Load Speed	200-500 RPM
Rated Current	25A
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	19/18kg
Carton Dimensions	440x390x300mm



GX5966GA1



**BRUSHLESS
MOTOR**



Imitating the pattern of hand
polishing

Cordless Gear-Driven Dual Action Polisher

Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Rated Voltage	18-21V
Orbit	8mm
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	160-480 RPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	20.5/19.5kg
Carton Dimensions	455x355x355mm



GX5966GA2



**BRUSHLESS
MOTOR**



Cordless Gear-Driven Dual Action Polisher

Polishing Pad Size	150mm
Backing Plate Size	125mm
Rated Voltage	18-21V
Orbit	8mm
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	160-550 RPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	20.5/19.5kg
Carton Dimensions	455x355x355mm





GX5905RO



**BRUSHLESS
MOTOR**



Cordless Rotary Polisher

Polishing Pad Size	100mm
Backing Plate Size	74mm
Rated Voltage	18-21V
Battery Capacity	2.0Ah-4.0Ah
Thread	M14mm
No Load Speed	1100-2500 RPM
Rated Current	25A
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	440x390x300mm



GX5966RO1



**BRUSHLESS
MOTOR**



Cordless Rotary Polisher

Polishing Pad Size	150mm
Backing Plate Size	125mm
Rated Voltage	18-21V
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	380-1800 RPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	19.5/18.5kg
Carton Dimensions	455x355x355mm



GX5966RO2



**BRUSHLESS
MOTOR**



Cordless Rotary Polisher

Polishing Pad Size	150mm
Backing Plate Size	125mm
Rated Voltage	18-21V
Battery Capacity	4.0Ah-5.0Ah
No Load Speed	380-1800 RPM
Rated Current	28A
Inner Box Dimensions	440x170x170mm
Qty	4pcs
G.W./N.W.	19.5/18.5kg
Carton Dimensions	495x355x355mm





GEAR-DRIVEN DUAL ACTION POLISHER

Delivers constant forced rotation and orbital motion under heavy load. This hybrid engineering ensures high-efficiency paint correction with zero risk of burning.

With the cutting power of a rotary polisher, but the safety of a dual action.

GX5808



AC BRUSHLESS
MOTOR



Smart LED Display with
6-Speed Control



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1480W
No Load Speed	300-600r/min
Orbit Per Minute	6000-12000 RPM
Orbit	8mm
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	535x500x300mm

- ★Advanced Brushless Technology
- ★Smart Microprocessor Control
- ★Restart Protection
- ★Zero Carbon Brushes for Maximum Durability
- ★Precision Constant Speed Control
- ★ Hologram-Free & Swirl-Free Results



GX5151



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	160-480 r/min
Orbit Per Minute	3200-9600 r/min
Orbit	8mm
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	535x500x300mm



II GX5151



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	160-480r/min
Orbit Per Minute	3200-9600 r/min
Orbit	8mm
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	535x500x300mm



III GX5151



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	160-480 r/min
Orbit Per Minute	3200-9600 r/min
Orbit	8mm
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	535x500x300mm





GX5251



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	160-550 RPM
Orbit	8mm
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	535x500x300mm



II GX5251



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	160-550 RPM
Orbit	8mm
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	535x500x300mm



GX5903



Ultra-Slim 19 cm Body Girth



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	235-525 RPM
Orbit	5mm
Polishing Pad Size	100mm
Backing Plate Size	75mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Packing Size	440x390x300mm



3"Mini Gear action Polisher
Multi-Patented
Design

GX5680



With constant speed circuit



Gear-Driven Dual Action Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	900W
No Load Speed	160-560 RPM
Orbit	8mm
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	335x240x145mm
Qty	6pcs
G.W./N.W.	16/15kg
Carton Dimensions	350x255x450mm



Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	900W
No Load Speed	1500-5000 OPM
Orbit	8mm
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	335x240x145mm
Qty	6pcs
G.W./N.W.	16/15kg
Carton Dimensions	350x255x450mm



RANDOM ORBITAL POLISHER

Engineered for heavy-duty paint correction and high-gloss finishing over large surfaces.
Highly efficient, balanced, and hologram-free.

Ergonomic Head Grip



Ideal for horizontal paint correction and large areas like the vehicle hood.

Side Handle Grip





Perfect for vertical panels and detailed, high-precision polishing.

D-Handle Grip



Designed for heavy-duty applications; lowers the center of gravity for maximum stability and less fatigue.

Technical Specifications

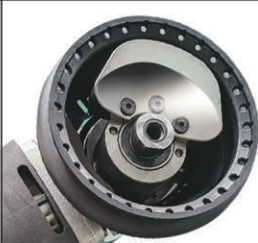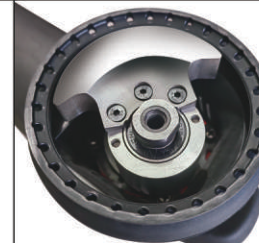Model	Power & No-load Speed		High precision CNC parts manufacturing process	
	860W	1200W	Orbit: 15mm	Orbit: 21mm
5115 / 5121	3000-6000OPM	2000-4800OPM		
II 5115 / II 5121				
III 5115 / III 5121				
5115B / 5121B				

GX5810DA



AC BRUSHLESS
MOTOR



Ultra-Slim 19 cm Body Girth

Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1850W
No Load Speed	2000-5900 OPM
Orbit	15/21mm
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	20/19kg
Carton Dimensions	535x500x300mm

- ★Advanced Brushless Technology
- ★Smart Microprocessor Control
- ★Restart Protection
- ★Zero Carbon Brushes for Maximum Durability
- ★Precision Constant Speed Control
- ★Friendly to Beginners, Perfect Paint Protection



GX5103



Ultra-Slim 19 cm Body Girth

Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	2000-5000 OPM
Orbit	8mm/12mm
Polishing Pad Size	50/75/100mm
Backing Plate Size	30/50/75mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17.5/16.5kg
Carton Dimensions	440x390x300mm

Tool-Free Quick-Change Drive Head for Orbital & Rotary Modes



12mm/8mm Orbit Drive Heads, Rotary Drive Head



Random Orbital Polisher



**AC BRUSHLESS
MOTOR**

- ★ Advanced Brushless Technology
- ★ Smart Microprocessor Control
- ★ Restart Protection
- ★ Zero Carbon Brushes for Maximum Durability
- ★ Precision Constant Speed Control
- ★ Friendly to Beginners, Perfect Paint Protection

GX5815

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1480W
No Load Speed	3000-6000 OPM
Orbit	15/21mm
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	535x500x300mm



Random Orbital Polisher



- Patented Technology & Vibration Control
42mm Extreme Orbit Design
 Doubles Your Polishing Efficiency

GX5115-32 GX5115-42

Rated Voltage	220V/110V	220V/110V
Rated Frequency	50Hz/60Hz	50Hz/60Hz
Rated Input Power	1200W	1200W
No Load Speed	2000-4800 OPM	2000-4800 OPM
Orbit	32mm	42mm
Polishing Pad Size	150mm	150mm
Backing Plate Size	125mm	125mm
Inner Box Dimensions	490x170x140cm	490x170x140mm
Qty	6 pcs	6 pcs
G.W./N.W.	20/19kg	20/19kg
Carton Dimensions	535x500x300cm	535x500x300mm

Random Orbital Polisher



GX5115 GX5121

Rated Voltage	220V/110V	220V/110V
Rated Frequency	50Hz/60Hz	50Hz/60Hz
Rated Input Power	860W/1200W	860W/1200W
No Load Speed	3000-6000opm	3000-6000opm
	2000-4800 OPM	2000-4800 OPM
Orbit	15mm	21mm
Polishing Pad Size	150mm	180mm
Backing Plate Size	123mm	148mm
Inner Box Dimensions	490x170x140mm	490x170x140mm
Qty	6pcs	6pcs
G.W./N.W.	21/20kg	21/20kg
Carton Dimensions	535x500x300mm	535x500x300mm

Random Orbital Polisher



Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	860W/1200W
No load speed	3000-6000 OPM
	2000-4800 OPM
Orbit	15mm
Polishing Pad Size	150mm
Backing Plate Size	123mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	21/20kg
Carton Dimensions	535x500x300mm

GX5115

GX5121

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	860W/1200W
No load speed	3000-6000 OPM
	2000-4800 OPM
Orbit	21mm
Polishing Pad Size	180mm
Backing Plate Size	148mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	21/20kg
Carton Dimensions	535x500x300mm

Random Orbital Polisher



Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	860W/1200W
No Load Speed	3000-6000 OPM
	2000-4800 OPM
Orbit	15mm
Polishing Pad Size	150mm
Backing Plate Size	123mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	21/20kg
Carton Dimensions	535x500x300mm

GX5115

GX5121

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	860W/1200W
No Load Speed	3000-6000 OPM
	2000-4800 OPM
Orbit	21mm
Polishing Pad Size	180mm
Backing Plate Size	148mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	21/20kg
Carton Dimensions	535x500x300mm

Random Orbital Polisher



Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	860W/1200W
No Load Speed	3000-6000 OPM
	2000-4800 OPM
Orbit	15mm
Polishing Pad Size	150mm
Backing Plate Size	123mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	21/20kg
Carton Dimensions	535x500x300mm

GX5115B

GX5121B

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	860W/1200W
No Load Speed	3000-6000 OPM
	2000-4800 OPM
Orbit	21mm
Polishing Pad Size	180mm
Backing Plate Size	148mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	21/20kg
Carton Dimensions	535x500x300mm

Random Orbital Polisher



Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	780W
No Load Speed	2000-5500 OPM
Orbit	10mm
Polishing Pad Size	100mm
Backing Plate Size	75mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm

GX5103





III GX5103



Ultra-Slim 19 cm Body Girth



Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	2000-5000 OPM
Orbit	9/12mm
Polishing Pad Size	100mm
Backing Plate Size	75mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	440x390x300mm



GX5125



Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	780W
No Load Speed	2000-5000 OPM
Orbit	8mm
Polishing Pad Size	150mm
Backing Plate Size	123mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	18/17kg
Carton Dimensions	440x390x300mm



III GX5125



Ultra-Slim 19 cm Body Girth



Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	2000-5000 OPM
Orbit	8mm
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm



GX5912




Ultra-Slim 19 cm Body Girth



Random Orbital Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	2000-5000 OPM
Orbit	12mm
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm



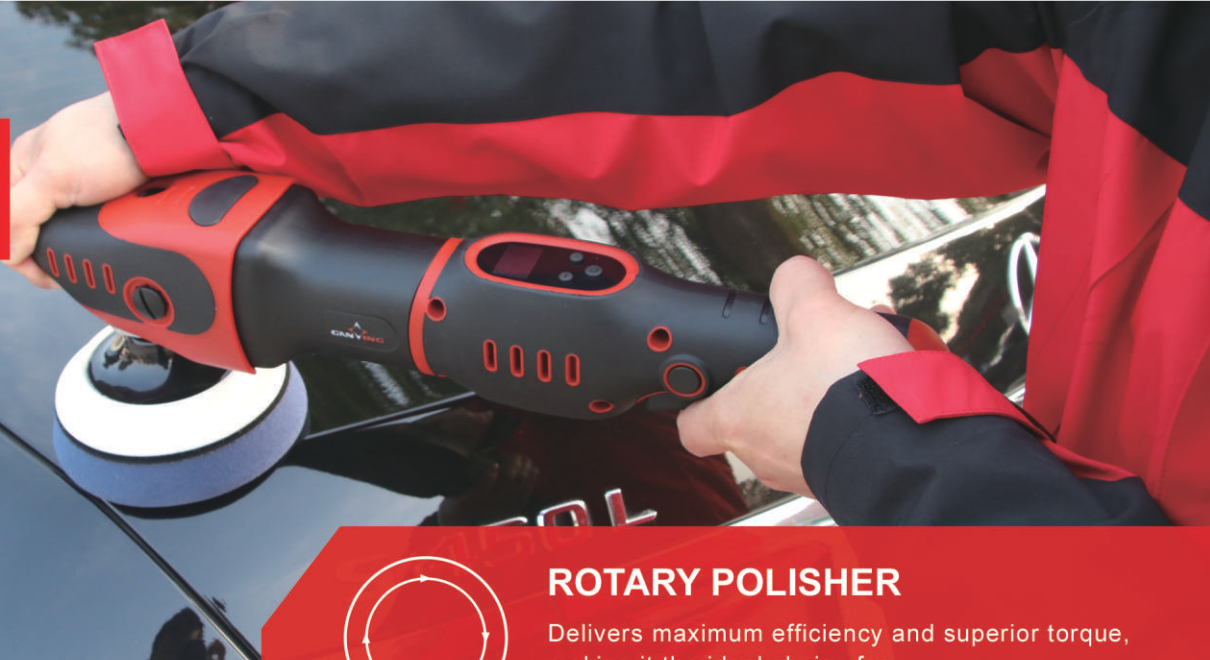

ROTARY POLISHER

Delivers maximum efficiency and superior torque, making it the ideal choice for professional detailers.

GX5809



- ★ Advanced Brushless Technology
- ★ Smart Microprocessor Control
- ★ Restart Protection
- ★ Zero Carbon Brushes for Maximum Durability
- ★ Precision Constant Speed Control
- ★ Powerful 14 Nm High-Torque Output
- ★ Extreme Cutting Power for Fast Removal of Deep Scratches



AC BRUSHLESS
MOTOR

Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1480W
No Load Speed	500-2100RPM
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	490x170x135mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	535x500x300mm

GX5810RO1



Ultra-Slim 19 cm Body Girth



Removable Dust Filter Cover



Electronic Speed Control

- ★ Advanced Brushless Technology
- ★ Smart Microprocessor Control
- ★ Restart Protection
- ★ Zero Carbon Brushes for Maximum Durability
- ★ Precision Constant Speed Control
- ★ Powerful 14 Nm High-Torque Output
- ★ Extreme Cutting Power for Fast Removal of Deep Scratches



AC BRUSHLESS
MOTOR

Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1850W
No Load Speed	500-2100RPM
Polishing Pad Size	150-180mm
Backing Plate Size	125-150mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	19/18kg
Carton Dimensions	535x500x300mm

GX5810RO



Ultra-Slim 19 cm Body Girth



Removable Dust Filter Cover



Electronic Speed Control

- ★ Advanced Brushless Technology
- ★ Smart Microprocessor Control
- ★ Restart Protection
- ★ Zero Carbon Brushes for Maximum Durability
- ★ Precision Constant Speed Control
- ★ Extreme Cutting Power for Fast Removal of Deep Scratches



AC BRUSHLESS
MOTOR

Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1850W
No Load Speed	1000-3200RPM
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	535x500x300mm



II GX5250



Super torque 14 nm
High efficiency working mode



Double Force Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1380W
No Load Speed	380-2100 RPM
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	19/18kg
Carton Dimensions	535x500x300mm



GX5250



Super torque 14 nm
High efficiency working mode



Double Force Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1380W
No Load Speed	380-2100 RPM
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	535x500x300mm



GX5150



Ideal for putty-coated
surface polishing &
glass refinishing



High-Speed Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	1100-4200 RPM
Polishing Pad Size	100-125mm
Backing Plate Size	75-100mm
Inner Box Dimensions	490x170x140mm
Qty	6pcs
G.W./N.W.	18.5/17.5kg
Carton Dimensions	535x500x300mm



GX5180



Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1580W
No Load Speed	600-3000 RPM
Polishing Pad Size	180mm
Inner Box Dimensions	550x180x120mm
Qty	4pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	560x380x260mm





GX5050A



Detail Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	780W
No load speed	1500-5000 RPM
Polishing Pad Size	100mm
Backing Plate Size	32-74mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm



GX6050



Detail Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	780W
No Load Speed	1500-5000 RPM
Polishing Pad Size	100mm
Backing Plate Size	32-74mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm



II GX6050



Ultra-Slim 19 cm Body Girth



Compact Detail Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	1500-5000 RPM
Polishing Pad Size	100mm
Backing Plate Size	32-74mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm



III GX6050



Ultra-Slim 19 cm Body Girth



Compact Detail Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	1500-5000 RPM
Polishing Pad Size	100mm
Backing Plate Size	32-74mm
Inner Box Dimensions	370x145x140mm
Qty	6pcs
G.W./N.W.	17/16kg
Carton Dimensions	440x390x300mm





GX5082B



Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1580W
No Load Speed	500-3300 RPM
Backing Plate Size	180mm
Inner Box Dimensions	550x180x120mm
Qty	4pcs
G.W./N.W.	16.5/15.5kg
Carton Dimensions	560x380x260mm



GX5083



Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1580W
No Load Speed	500-3300 RPM
Backing Plate Size	180mm
Inner Box Dimensions	445x170x135mm
Qty	6pcs
G.W./N.W.	24.5/23.5kg
Carton Dimensions	530x460x290mm



GX5082



Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1400W
No Load Speed	500-3000 RPM
Backing Plate Size	180mm
Inner Box Dimensions	445x170x135mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	530x460x290mm



GX5085



Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	1200W
No Load Speed	600-3000 RPM
Backing Plate Size	180mm
Inner Box Dimensions	445x170x135mm
Qty	6pcs
G.W./N.W.	22/21kg
Carton Dimensions	530x460x290mm





With constant speed circuit



GX5690

Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	900W
No Load Speed	600-2000 RPM
Polishing Pad Size	150mm
Backing Plate Size	125mm
Inner Box Dimensions	310x110x235mm
Qty	8pcs
G.W./N.W.	22.5/21.5kg
Carton Dimensions	635x460x250mm



GX5080

Rotary Polisher

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	900W
No Load Speed	600-2000 RPM
Backing Plate Size	180mm
Inner Box Dimensions	310x110x235mm
Qty	8pcs
G.W./N.W.	22.5/21.5kg
Carton Dimensions	635x460x250mm

SPOT POLISHING ACCESSORIES



GA03

Gear-Driven Polishing Adapter

Output Shaft: $\phi 10$ mm
Polishing Pad Size: $\phi 75$ mm



DA05

Random Orbital Adapter

Thread Type: M10 / M14
Polishing Pad Size: $\phi 75$ / 125 / 150 mm



Cable Clamp



M14x140 M14x100 M14x75



Extension rod




6 mm Flexible Shaft Kit (with Accessories)



3 mm Flexible Shaft Kit (with Accessories)



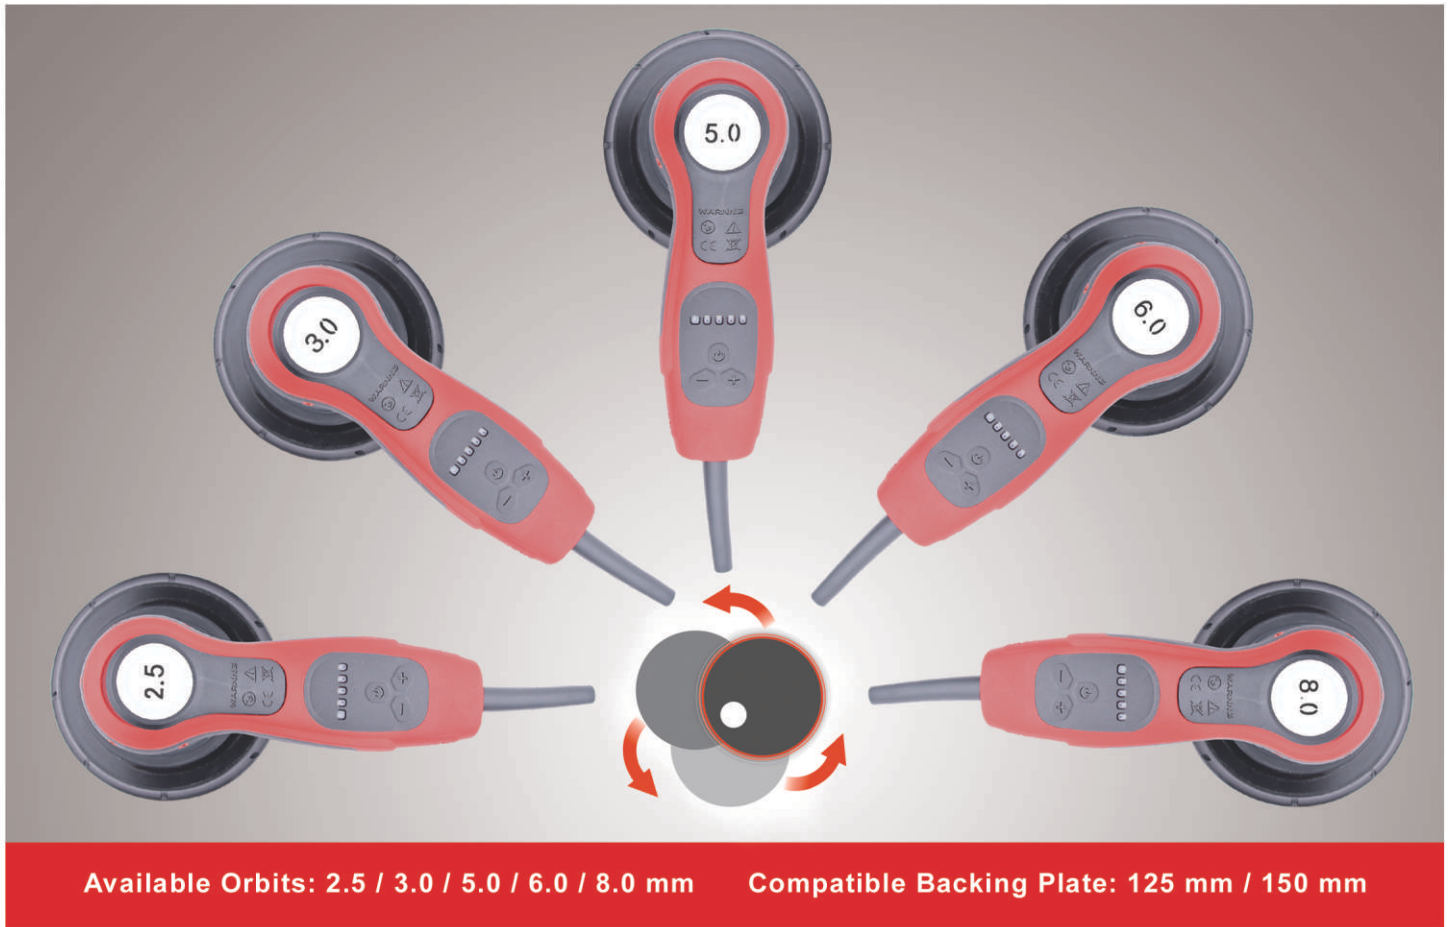

GX5805

AC BRUSHLESS
MOTOR



- ★ Advanced Brushless Technology
- ★ Smart Microprocessor Control
- ★ Restart Protection
- ★ One-Touch 5-Speed Control with LED Display
- ★ Zero Carbon Brushes for Maximum Durability
- ★ Dual-Switch Safety System
- ★ Constant Speed Electronics Under Load
- ★ Dust-Free Sanding with Central Vacuum Compatibility



Dust Extraction Orbital Sander

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	380W
No Load Speed	4000-10000 OPM
Orbit	2.5/3.0//5.0/6.0/8.0mm
Backing Plate Size	125-150mm
Inner Box Dimensions	320x170x155mm
Qty	6pcs
G.W./N.W.	12/11kg
Carton Dimensions	525x355x325mm



GX5803D

AC BRUSHLESS
MOTOR



Dust Extraction Orbital Sander

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	380W
No Load Speed	4000-10000 RPM
Orbit	3mm
Backing Plate Size	75x100mm
Inner Box Dimensions	320x170x155mm
Qty	6pcs
G.W./N.W.	12/115kg
Carton Dimensions	525x355x325mm



GX5803

AC BRUSHLESS
MOTOR



Dust Extraction Orbital Sander

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	380W
No Load Speed	4000-10000 RPM
Orbit	3mm
Backing Plate Size	70x198mm
Inner Box Dimensions	320x170x155mm
Qty	6pcs
G.W./N.W.	12/115kg
Carton Dimensions	525x355x325mm



III GX6050&408



Dust Extraction Orbital Sander

Rated Voltage	220V/110V
Rated Frequency	50Hz/60Hz
Rated Input Power	710W
No Load Speed	2000-8000 RPM
Orbit	4mm
Backing Plate Size	80x400mm
Inner Box Dimensions	530x125x160mm
Qty	4pcs
G.W./N.W.	17/16kg
Carton Dimensions	540x270x340mm





YONGKANG GANXING POWER TOOLS CO., LTD

Add: No.8 Building 11, Guangchang East Road,
Xiadianwu Village Dongcheng Street, Yongkang City,
Zhejiang Province 321300 P.R. China

Tel: +86-13335790798 +86-13967930665

Fax: +86-579-87293328

Web: <https://www.ganxingtools.com>

<http://ganxing.1688.com>

E-mail: contact@ganxingtools.com